

SpectralLED® RS-7-7 Tunable Light Source – Light Booth




The SpectralLED® Light Booth quickly simulates virtually infinite lighting conditions enabling visual color assessment for photography, product display or lighting design applications. Both real and theoretical lighting conditions can be produced, enabling CRI experimentation, analysis and optimization.

The SpectralLED® Tunable Light Source incorporates up to 35 discrete wavelengths for synthesis of commercially available light sources or based on spectra that you import. The platform is easily adaptable for automated test systems and production line integration, with integrated optical feedback and temperature control to ensure rock-solid stability and consistent results.

Unprecedented Resolution and Accuracy For CRI Experimentation, Analysis & Optimization

- All Solid-State Design for Rapid Start-up, Repeatable Performance and Long Operating Lifetime
- Built-in RMS Spectral Fitting for Simulation of User Imported Spectra
- Wavelength Options From the UVA to the Near Infrared
- Quickly Simulate any CIE Illuminant or Macbeth™ / X-RITE™ Color Patch
- Constant Current Drivers & Built-in Optical Feedback Ensure Accurate & Flicker-free Output in Real Time
- ISO/IEC 17025 Accredited by NVLAP (NVLAP lab code 200823-0) for Calibration Accuracy

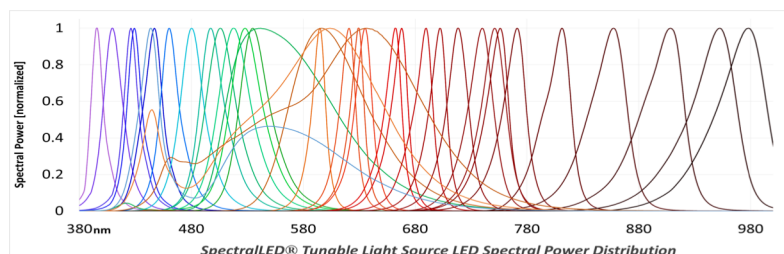

| RS-7-7 Optical Specifications | | |
|---|--|---|
| Measurement Applications <ul style="list-style-type: none"> • White Balance • Quantum Efficiency • Spatial Non-uniformity • Pixel Defects • Crosstalk • Vignetting Correction • Sensitivity • Responsivity • Signal to noise • Linearity • ISO Speed • Saturation Exposure • Dynamic range | Spectral Range | 380 nm to 1,000 nm (Custom ranges available on request) |
| | Spectral Output | 32 discrete LED channels, 3 broadband LED Channels Visible resolution ~ 15 nm, NIR resolution ~ 50 nm (typical channel spacing) |
| | Spectral Peaks | 395nm, 405nm, 420nm, 430nm, 450nm, 460nm, 475nm, 495nm, 505nm, 520nm, 525nm, 535nm, 570nm, 595nm, 610nm, 620nm, 630nm, 637nm, 660nm, 675nm, 685nm, 715nm, 700nm, 730nm, 750nm, 760nm, 780nm, 805nm, 850nm, 895nm, 940nm, 965nm 2,700K Warm White, 3,000K Warm White, 6,500K Cool White (Custom configurations available) |
| | Spectral Bandwidth | Typical: Visible 20nm FWHM, NIR 50nm FWHM |
| | CCT Range | 1,900K to 40,000K |
| | Preset Spectra | CIE Illuminants A, B, C, D50, D55, D65, D75, E, F1-F12, Macbeth™ / X-Rite™ Color Patches |
| | Custom Preset Spectra | Configurable at time of order via API. Contact factory for details |
| | Accuracy Specifications | |
| | Illumination Stability | ≥ 99.99% after 50 ms for radiance or after 2,000 ms for color |
| | Illumination Accuracy | ± 1% Absolute, NIST traceable |
| Spectral Accuracy | ± 1 nm centroid wavelength | |
| Color Accuracy | CIE 1931 x, y ± 0.003 | |
| Linearity | < 0.1 % RMS of full scale | |
| Temperature Stability | Within ± 1° C via active TEC | |
| Long-term Drift | Output ≤ 2% Spectral ≤ 1 nm (channel dependent) | |
| Electrical Specifications | | |
| Electrical Resolution | 16 bit DAC for channel current drivers 24 bit ADC for internal radiance monitor feedback | |
| Dynamic Range Adjustment | 4-5 decades typical (spectrum dependent) | |
| LED Control | Pure DC constant current with floating differential sensing | |
| General Specifications | | |
| Software | Firmware includes full spectral calibration with spectral fitting, preset storage, real-time optical feedback, radiometric and photometric units supported | |
| Interface Connectors | USB 2.0 type B and DB-9 | |
| Interface Protocol | Simple ASCII commands with optional binary block transfer | |
| Supported Operating Systems | USB drivers for Windows, OSX and Linux via FTDI virtual COM port Legacy RS-232 serial port for integration (no OS required) | |
| Input Voltage and Power | 110 to 240 VAC at 50-60Hz, 600W maximum | |
| Interior Dimensions | 45 x 45 x 45 cm (preliminary) | |
| Upgrades | | |
| RS-7 Wavemon | Multi-channel photodiode system provides amplitude feedback & real-time wavelength measurements | |

Specifications are subject to change without notice